



Thank you for purchasing the Futureglass **Wall Mounted Turntable Support!**




The design of this shelving allows easy installation by a competent adult.

The simple assembly requires a drill bit to suit the rawl plugs (8mm at time of writing) a measure and a cross headed screwdriver.

Please take a few moments to read these instructions to get the most from the product.

ASSEMBLY INSTRUCTIONS

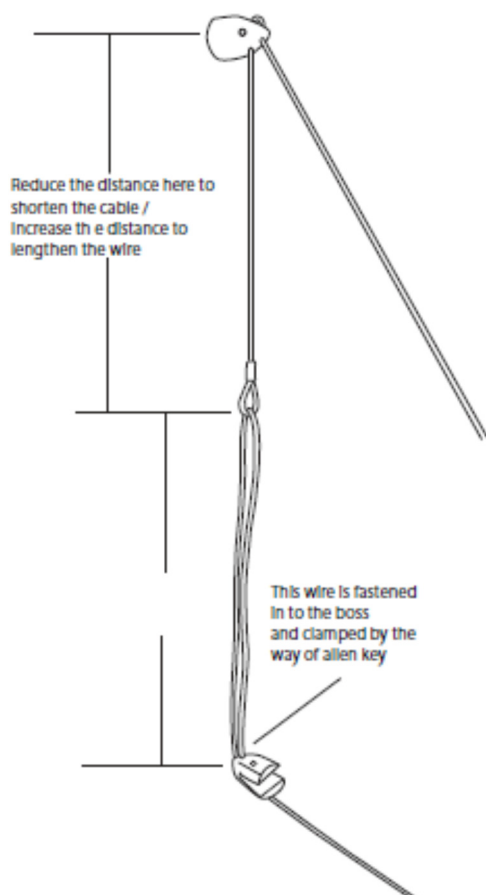

1. Starting two level holes into a SOLID wall, position the holes so that they are 25mm in from the edge of the glass i.e. 600mm glass is 550mm centre spacing. REMEMBER that the height of the shelf is always below the holes by approximately the depth of the glass.
2. Screw the fixing screw through the grub screw and into the rawlplugs.
3. Now screw the top boss onto the stud in the wall.
4. Now thread the end of the wire without the loop upwards through the back hole.
5. Take the wire now down through the front hole, taking care not to Kink the wire as it needs adjustment in the future. Now the wire must go UPWARDS through the hole nearest the point (with the nylon grub screw facing down) and thread it through the loop end of the wire above.


(assembly instructions continued on next page)

The glass supplied is toughened to BS6206A for safety. In order to maximize this safety; please follow the following precautions.

- | | |
|--|---|
| 1. Never drag the table - Always lift with assistance | 8. Avoid subjecting the table to impact. |
| 2. Replace any damaged glass with that of identical specification. | 9. Never sit or stand on the table. |
| 3. Never place heavy objects onto the table. | 10. The table is not suitable for rough use |
| 4. Use a suitable non-abrasive glass cleaner. | 11. Always lift the table by the glass to move it, never drag it or lift by the legs. |
| 5. Take care when moving the table. | 12. In the unlikely event of breakage, a competent person must clear thoroughly the area of sharp shards of glass, which may cut. |
| 6. Take care in positioning the table. | |
| 7. Never place hot pans onto the table. | |



Thank you for purchasing the Futureglass **Wall Mounted Turntable Support!**
page 2

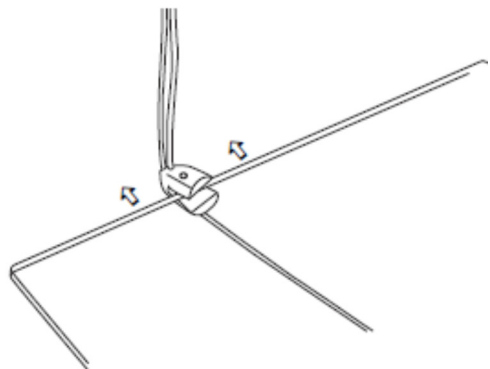

6. The glass can now be positioned into the slot, and the wire brought around the front of the glass. Ensure that both wires are secured in the grub screws and the nylon grub screws are securing the glass.

7. Adjust the shelf by increasing or decreasing the distance of the loop to the top threaded boss.